CUT KNURLING TOOL C611













ADDED VALUES

- Adaptable, patented QUICK cooling unit
- Multifunctional: For use in front of and behind the rotation centre
- Flexible shank variation
- Head and shank fully exchangeable due to compatible interface

Order no.	Model	Workpiece Ø [mm]	Knurling wheel (Ø x w x b) [mm]	Dimensions [mm]					
				а	b	С	d	е	f
32000037	C611-10M	3 – 50	14.5 x 3 x 5	10	16	106	35	25.6	32
32000038	C611-12M	3 – 50	14.5 x 3 x 5	12	16	106	35	25.6	32
32000039	C611-16M	3 – 50	14.5 x 3 x 5	16	16	106	35	25.6	32
32000043	C611-20M	5 – 250	21.5 x 5 x 8	20	25	149	56.5	38.3	50
32000044	C611-25M	5 – 250	21.5 x 5 x 8	25	25	149	56.5	38.3	50


E-KIT

Order no.	Knurling wheel (Ø x w x b) [mm]			
22BHR0507	14.5 x 3 x 5			
22BHR0508	21.5 x 5 x 8			





O @UICK C811 / C612

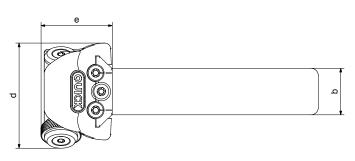

ADAPTER

Order no.	Description			
22BHR0152	Adapter 10 x 10			
22BHR0151	Adapter 12 x 12			
22BHR0150	Adapter 16 x 16			



COOLANT NOZZLE

Order no.	Knurling wheel (Ø x w x b) [mm]			
0001100145	14525			
22BHR0145	14.5 x 3 x 5			
22BHR0136	21.5 x 5 x 8			



The adjustable coolant nozzle ensures the precise supply of coolant to the workpiece and the knurling wheels.